
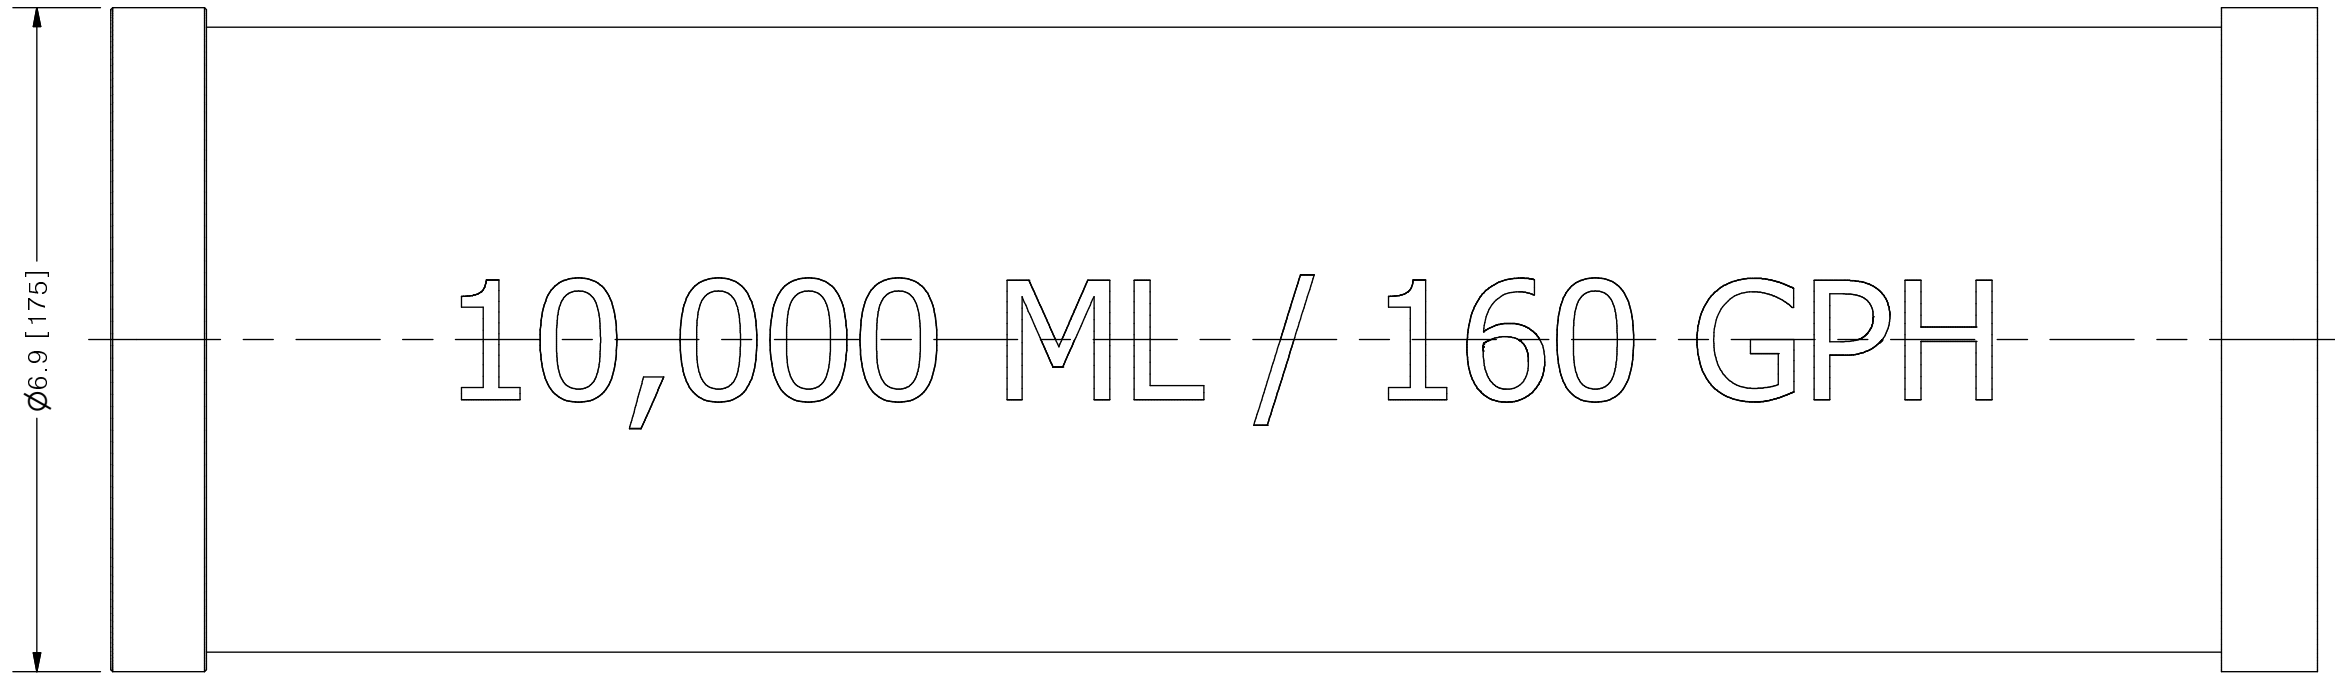


THIS DRAWING IS THE PROPERTY OF PRIMARY FLUID SYSTEMS INC. FROM WHICH A WRITTEN CONSENT FOR APPROVAL SHALL BE REQUIRED PRIOR TO COPYING.

	NO.	NAME	DESCRIPTION
	1	MAX ALLOWABLE OPERATING TEMPERATURE	140°F (60°C)
	2	MAX ALLOWABLE OPERATING PRESSURE	15 PSIG
CONNECTIONS	3	BOTTOM PORT CONNECTION	2"
	4	TOP PORT CONNECTION	N/A
	5	TYPE	NPT
MATERIALS	6	CYLINDER	CLEAR PVC
	7	END CAP	PVC
	8	GLUE	CPVC, CHEMICAL RESISTANT
INPUT DATA	9	VOLUME SIZE	10000 ML / 160 GPH
SCALE	10	BI DIRECTIONAL GRADUATIONS	200 ML / 2 GPH DIVISIONS
	11	ALL CYLINDERS ARE RATED FOR LIQUID SERVICE ONLY	√
COMMENTS	12	CYLINDERS ARE NOT PRESSURE VESSELS	√
		NSF 61 APPROVED	

CLEARVIEW® CV#3 PVC CALIBRATION CYLINDER

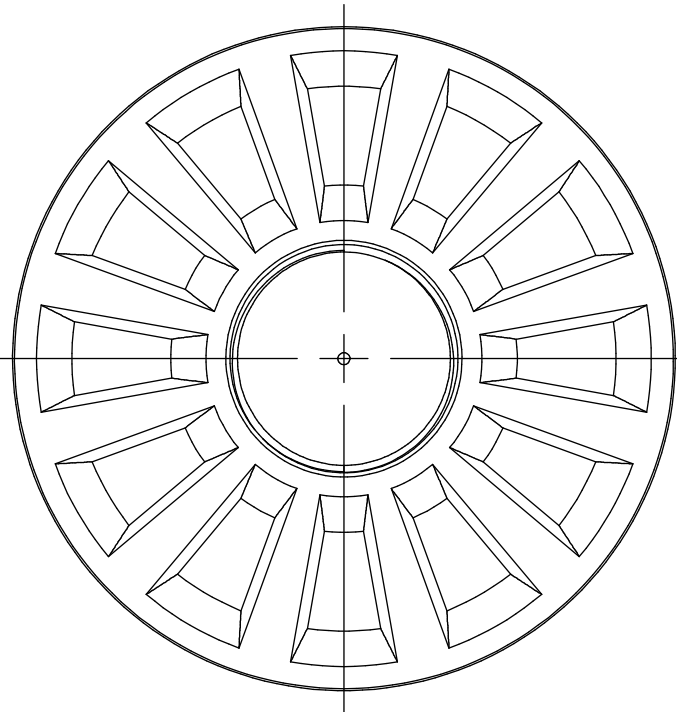

Ø6.9 [175]

10,000 ML / 160 GPH

SCALE 1:2

23.00 [584]

REV	DESCRIPTION	DATE	NAME
0	NEW DRAWING	--	--

PRIMARY FLUID SYSTEMS INC. 1050 COOKE BLVD, BURLINGTON, ONTARIO L7T 4A8		PROJECT: CV	SHT: 1 OF 1	DRAWN BY: NG
TITLE: 10000 ML CALIBRATION CYLINDER WITH 2" NPT CONNECTION		DATE DRAWN: 5/9/2016	SCALE: 1:2	UNITS: INCH [mm]
DWG NO: CV#3-10000_R0		MATERIAL: SEE CHART	DIMENSIONAL TOLERANCE 0.X = ± 0.25" 0.XX = ± 0.25" 0.XXX = ± 0.25"	
DWG NAME: CV CYLINDER DWG TYPE: PLANAR VIEW		APPROVED BY:	CHECKED BY:	THIRD ANGLE PROJECTION
				REV# 0 SHEET SIZE: B