


**NOTE: SERIAL NUMBER & MODEL REQUIRED FOR PARTS ORDER**

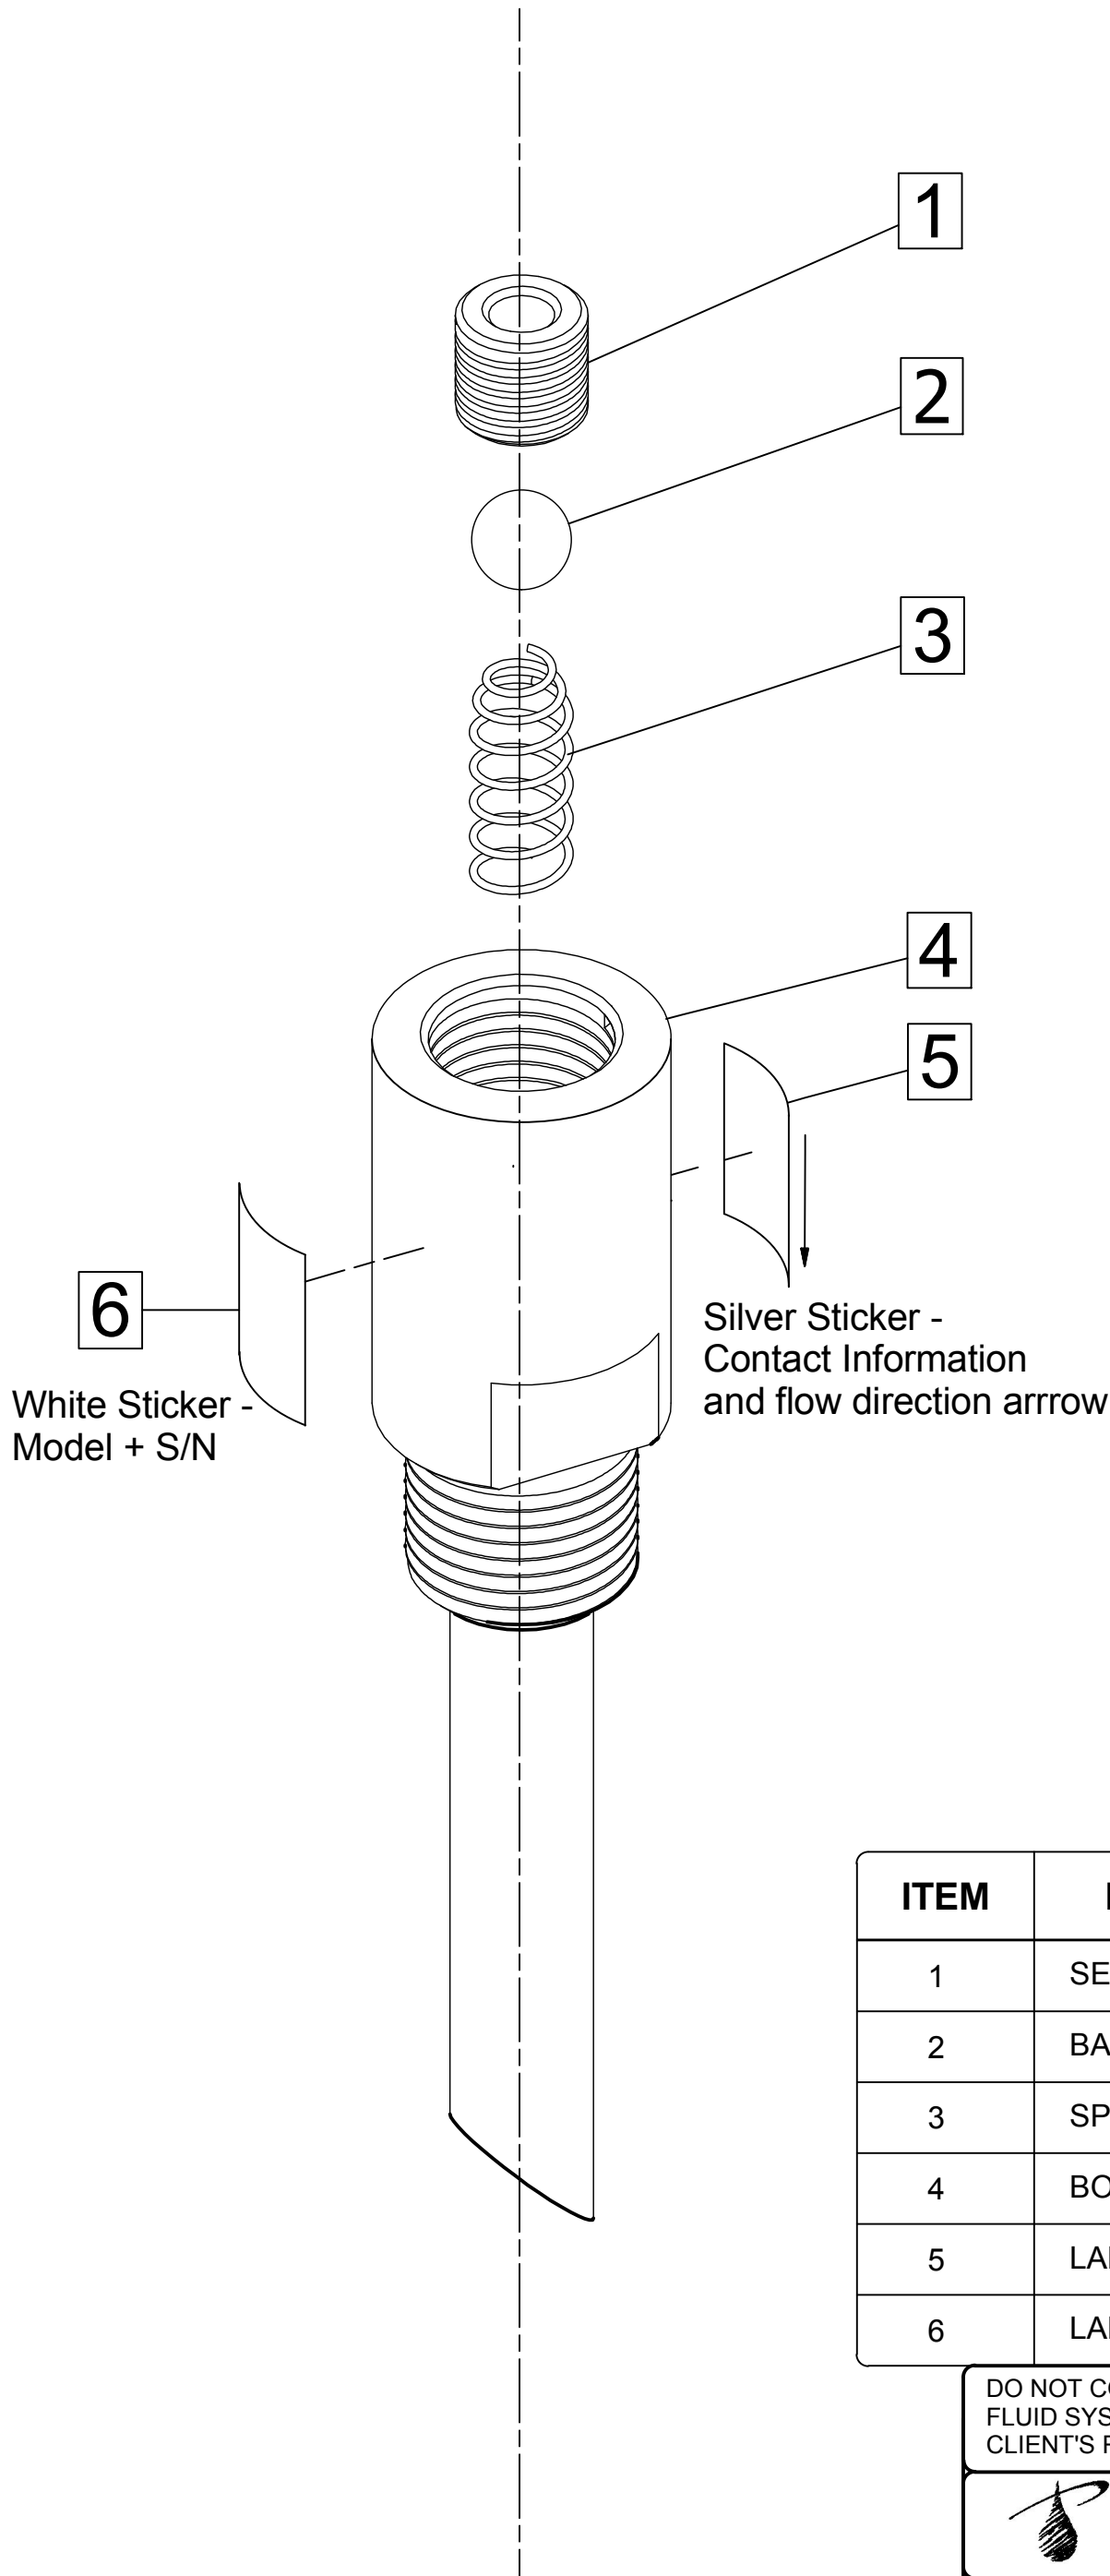

**MATERIAL/SIZE CODING**

W = S/S6 = ( 316 STAINLESS STEEL )  
 W = HAST = ( HASTELLOY C276 )  
 W = ALL20 = ( ALLOY20 )  
 W = TITA = ( TITANIUM GR.2 )

X = S/S6 = ( 316 STAINLESS STEEL )  
 X = HAST = ( HASTELLOY C276 )  
 X = TITA = ( TITANIUM Gr.2 )  
 X = CR = ( CERAMIC )  
 X = GFTFE = ( 25% GF PTFE )  
 X = PVDF = ( PVDF )

Y = S/S6 = ( 316 STAINLESS STEEL )  
 Y = HAST = ( HASTELLOY C276 )  
 Y = TITA = ( TITANIUM BETA C )

Z = 3" INSERTION UNITS  
 Z = 5" INSERTION UNITS  
 Z = OTHER THAN STANDARD LENGTH  
 CONTACT FACTORY

^ = S = ( 316 STAINLESS STEEL )  
 ^ = H = (HASTELLOY C276)  
 ^ = A = (ALLOY20)  
 ^ = T = (TITANIUM GR. 2)

ITEM	DESCRIPTOIN	PART NUMBER
1	SEAT, CHECK	IQF - 1W - SEAT
2	BALL, CHECK	IQF - 1X - BALL
3	SPRING, CHECK	IQF - 1Y - SPRING
4	BODY, QUILL	IQF - 5Z - ^
5	LABEL, DIRECTION, SILVER	IQF - LABEL - DIR
6	LABEL, MODEL + SERIAL #	MSLABEL

DO NOT COPY WITHOUT PRIOR WRITTEN APPROVAL FROM PRIMARY FLUID SYSTEMS. ACCEPTABILITY OF SPECIFICATIONS ARE THE CLIENT'S RESPONSIBILITY.



**Primary Fluid Systems Inc.**

**PFS INJECTION QUILL - ALLOY  
 EXPLODED VIEW**

SCALE	DISC	DRAWN BY	
DATE	APPROVED	DWG NO.	REV. #
PROJECT			