

HOW TO ORDER

ECO VALVE*

Backpressure/Pressure Sustaining and Pressure Relief Valves

ECO Valve Standard Material of Construction

CPVC (polyvinylchloride) Top – (Corzan)

PTFE laminated to EPDM diaphragm – standard on all valves (see below for Misc. options)

Stainless Steel Fasteners

Gauge Port – both sides of valve ready for drilling and tapping (see below for Misc. options)

Threaded Body – (see below for Valve Style or Connection options)


150 psig max. Rated – (see below for Valve Style or Connection options)

140°F (60°C) max. Temp. Rated – (see below for Valve Style or Connection options)

NOTE: CRN is available on certain valves. Please contact factory for price and availability.

Example: ECO-50A-PVDF-V-NL

ECO Valve – Backpressure - FNPT thread - ½" Valve Port Connection - Body Material of PVDF
Viton Diaphragm - Threaded gauge port (Flow left to right)

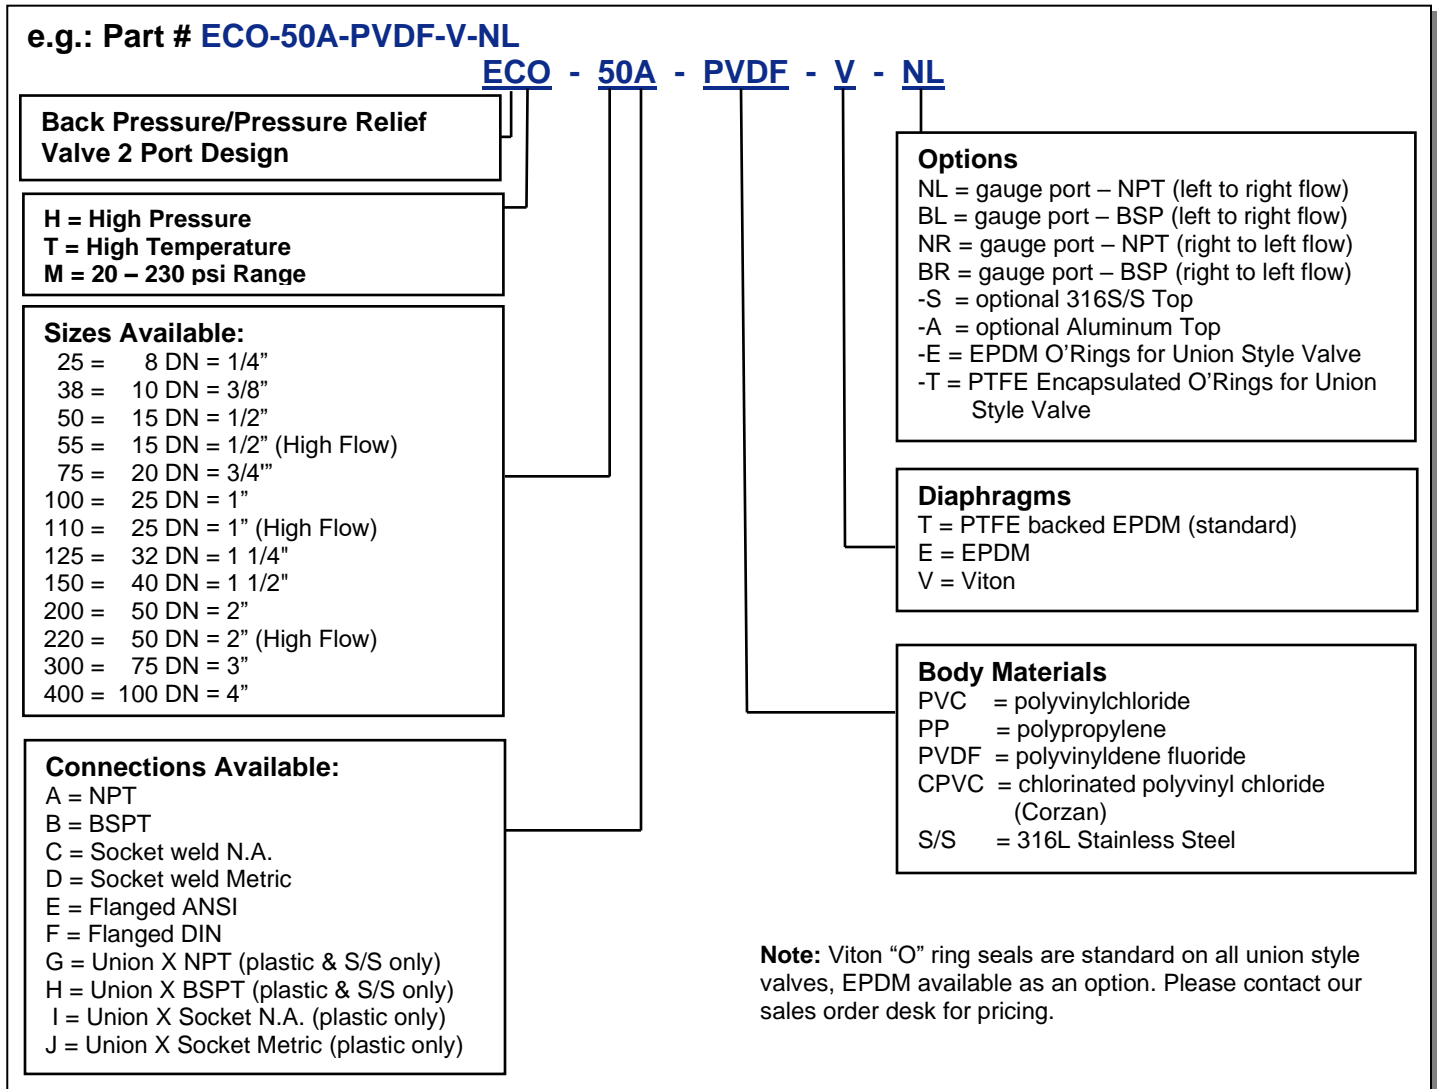

As Manufactured By:



PRIMARY FLUID
SYSTEMS INC.

Tel: (905) 333-8743
Fax: (905) 333-8746
North America Toll Free – 1-866-324-6422

E-Mail: sales@ecovalve.ca
http:// www.ecovalve.ca