
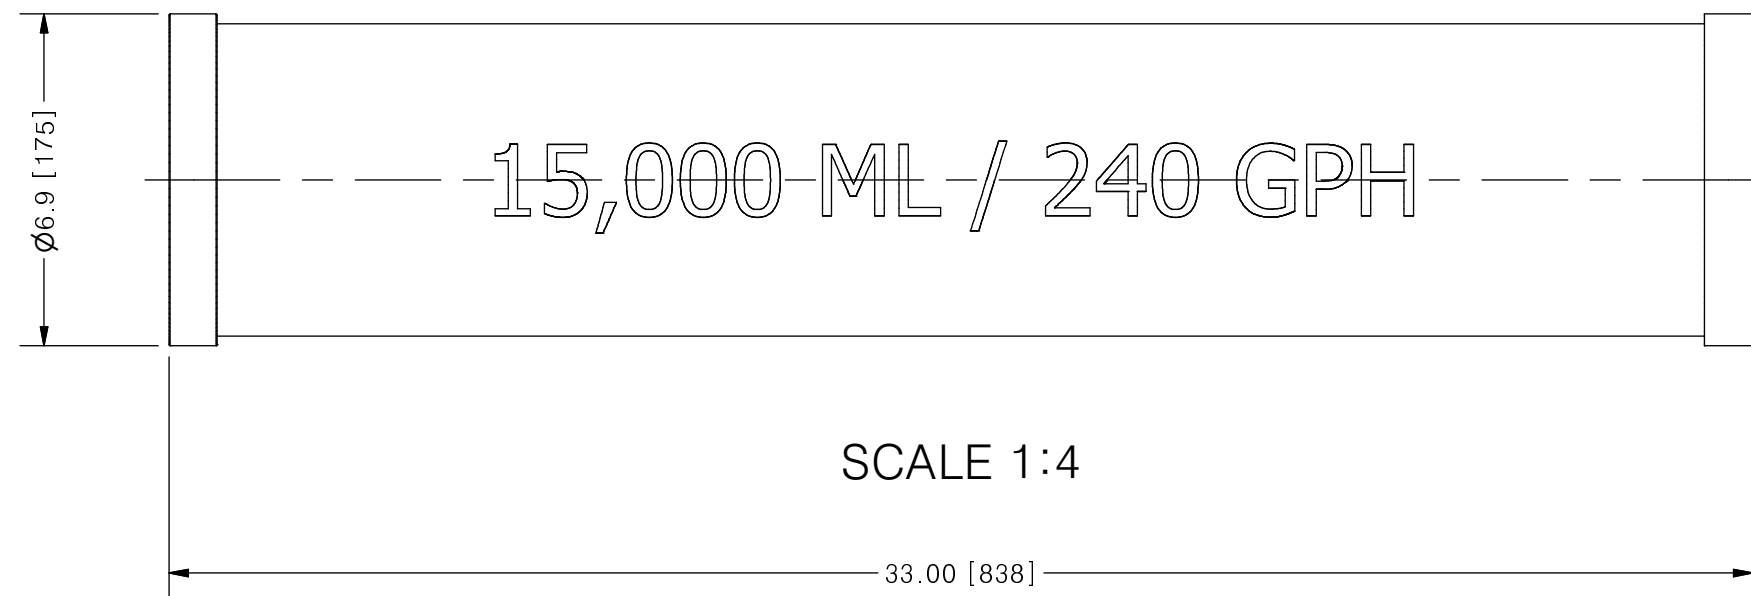


THIS DRAWING IS THE PROPERTY OF PRIMARY FLUID SYSTEMS INC. FROM WHICH A WRITTEN CONSENT FOR APPROVAL SHALL BE REQUIRED PRIOR TO COPYING.

	NO.	NAME	DESCRIPTION
	1	MAX ALLOWABLE OPERATING TEMPERATURE	140°F (60°C)
	2	MAX ALLOWABLE OPERATING PRESSURE	15 PSIG
CONNECTIONS	3	BOTTOM PORT CONNECTION	2"
	4	TOP PORT CONNECTION	N/A
	5	TYPE	NPT
MATERIALS	6	CYLINDER	CLEAR PVC
	7	END CAP	PVC
	8	GLUE	CPVC, CHEMICAL RESISTANT
INPUT DATA	9	VOLUME SIZE	15000 ML / 240 GPH
SCALE	10	BI DIRECTIONAL GRADUATIONS	200 ML / 2 GPH DIVISIONS
	11	ALL CYLINDERS ARE RATED FOR LIQUID SERVICE ONLY	√
COMMENTS	12	CYLINDERS ARE NOT PRESSURE VESSELS	√
		NSF 61 APPROVED	

CLEARVIEW® CV#3 PVC CALIBRATION CYLINDER

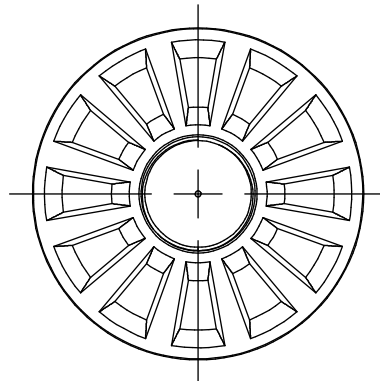

REV	DESCRIPTION	DATE	NAME
0	NEW DRAWING	--	--

REVISION HISTORY

PRIMARY FLUID SYSTEMS INC. 1050 COOKE BLVD, BURLINGTON, ONTARIO L7T 4A8		PROJECT: CV	SHT: 1 OF 1	DRAWN BY: NG
		DATE DRAWN: 5/9/2016	SCALE: 1:4	UNITS: INCH [mm]
TITLE: 15000 ML CALIBRATION CYLINDER WITH 2" NPT CONNECTION		MATERIAL: SEE CHART	REV# 0	
DWG NO: CV#3-15000_R0		DIMENSIONAL TOLERANCE 0.X = ± 0.25" 0.XX = ± 0.25" 0.XXX = ± 0.25"		
DWG NAME: CV CYLINDER	APPROVED BY:	CHECKED BY:	THIRD ANGLE PROJECTION 	
DWG TYPE: PLANAR VIEW				